

DrayTek

VigorAP 810

802.11n Access Point

- Business-class IEEE 802.11n WLAN access point
- Supports 802.3af Power over Ethernet (PoE-PD)
- Wi-Fi multimedia (WMM) quality of service features
- Comprehensive and trusted security
- Supports 4 SSIDs
- Multiple operation modes: access point, wireless client, wireless distribution system (WDS) with access point, WDS/bridge (No AP broadcasting)
- Supports basic Vigor routers' AP Management



With a stable and extendable wireless network, both business and home/SOHO users can easily utilize and enjoy high-bandwidth applications, such as ERP/CRM, VoIP, video on demand, e-learning (e.g. iTunes U), and so much more. The VigorAP 810 is a wireless Access Point (AP) with MIMO technology and Power over Ethernet (PoE) support. That means you can have most advanced wireless network standard for the coverage backward compatible with 802.11b/g standard. Moreover, you would have easy AP installation no matter where the power plug is. At last but not least, VigorAP 810 delivers reliable and secure wireless local area networks (WLANs) through the simplified but robust management and configuration. See below for more feature details.

Supports basic Vigor routers' AP Management

We already implemented the AP Management (APM) on some Vigor routers with 3-step installation to let you easily deploy WLAN for your office network. With the unified user interface of Vigor routers, the status of VigorAP 810 is clear at the first sight.

PoE for easy installation

Power over Ethernet (PoE) support eases the installation by running only one cable to VigorAP 810 to deliver both data and power. You can mount VigorAP 810 to the place which is best for extending coverage without considering if there is ready access to a power plug. Of course, you can also use the included AC adapter if power is available nearby.

WMM for Wi-Fi application prioritization

DrayTek implements intelligent wireless prioritization technology on VigorAP 810 for best utilization of wireless coverage. VigorAP 810 supports Wi-Fi Multi Media standard (WMM). It is a standard created to define Quality of Service (QoS) in Wi-Fi networks. It is a precursor to the upcoming IEEE 802.11e WLAN QoS draft standard, which is meant to improve audio, video and voice applications transmitted over Wi-Fi. WMM adds prioritized capabilities to Wi-Fi networks and optimizes their performance when multiple concurring applications, each with different latency and throughput requirements, compete for network resources.

SSID + 2 VLAN groups for workplace security & parental control

The VigorAP 810 supports 4 separate SSIDs and two virtual LANs (VLANs). You can set certain SSID(s) accessing Internet through either VLAN A or B (LAN_A or LAN_B in WUI). As a result, the VigorAP 810 divides itself into several virtual access points all within a single hardware platform.

Many mobile networks deployed at corporate offices, hotels, shopping malls or restaurants can take advantage of this technology to support several applications such as public Internet access and inventory management. For example, guests of a company could be given wireless access for the Internet, but they are excluded from any access to the internal data server. For home users, they can set up different authorization for SSIDs to their K12 kids, young adults and parents to avoid inappropriate contents accessed by underage family members.

Comprehensive WLAN security control

You can obtain the MAC addresses of each wireless client from its configuration utility or operating system. You then enter these addresses into a configuration page of VigorAP 810. When MAC address filtering is activated, VigorAP 810 performs additional check for wireless clients to prevent network breaking. Clients within the authenticated list will be able to join with the WLAN. Those who are not on the list will be denied while VigorAP 810 receives their request to join the WLAN.

With industry level security standards for wireless user authentication and data encryption, 802.11i (WPA2) offers strengthened and interoperable wireless networking security. The activation of 802.1x RADIUS (Remote Authentication Dial-in User Service) allows you centrally manage and store user names and passwords. You can ensure that only legitimate clients can be associated with corporate RADIUS servers.

WDS for unlimited coverage extensibility

The VigorAP 810 can extend over large areas (alike shopping mall) by its "WDS" (wireless distribution system). WDS takes care of the establishment of WLAN network with "point-to-point" and "point-to-multipoint" bridging and repeater modes. The repeater mode provides extend wireless access to additional clients where there is a relay AP repeats signal from a base AP to distant clients. The bridge-to-bridge mode allows two wired networks to be connected across some distance. The detachable antenna will let you replace with DrayTek antennas for directional signal shaping or mounting flexibility.

Embedded USB printer server

You can connect a printer to the USB port of VigorAP 810 for users from wired PC or wireless network. i.e. The laptop users can access printer for printing. When you are using a pair of VigorAP 810s to make a bridge, the said printer can be installed elsewhere in your office/ home.

Wireless AP

- IEEE802.11b/g/n Compliant
- Mode:
 - AP Mode
 - Station Infrastructure
 - AP Bridge Point to Point
 - AP Bridge Point to Multipoint
 - AP Bridge WDS (Wireless Distribution System)
 - Universal Repeater
- Wireless Client List
- 64/128-bit WEP/WPA/WPA2
- Multiple SSIDs
- Hidden SSID
- WPS
- WMM
- MAC Address Control
- Wireless Isolation
- Internal RADIUS Server (Up to 96 Accounts)
- MAC Clone
- 802.1x Authentication
 - Internal RADIUS Server Support PEAP
 - RADIUS Proxy Support TLS & PEAP
- DHCP Server & Client
- VLAN Grouping and SSID Mapping for LAN A & B
- Management VLAN for LAN A & B
- Limited Wireless Clients (Up to 64 Clients)
- Bandwidth Management for Multiple SSIDs

USB


- Printer Server

Network Management

- Web-based User Interface (HTTP/HTTPS)
- CLI (Command Line Interface, Telnet)
- Configuration Backup/Restore
- Firmware Upgrade via HTTP/HTTPS/TR-069
- Syslog
- TR-069 (Compliant with VigorACS SI)
- AP Management (with Vigor Series Routers)
 - Auto Provision
 - AP Status and Traffic Graph


Hardware Interface

- 5 x 10/100 Base-TX LAN Switch, RJ-45 (1 x PoE Port on LAN-A1 Port)
- 1 x USB 2.0 Host
- 2 x Detached Antennas
- 1 x Factory Reset Button
- 1 x Wireless ON / OFF / WPS Button
- 1 x Power ON / OFF Button

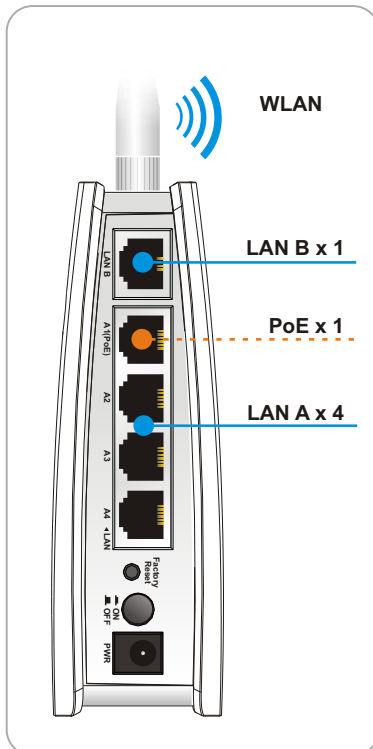

AP Management

WLAN Setting

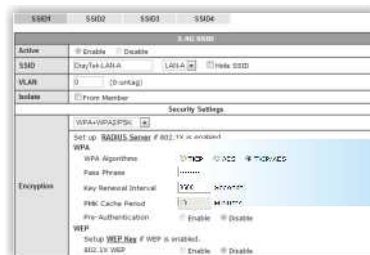

AP Status

Index	Device Name	IP Address	SSID	Ch.	Encryption	WL Clients	Firmware	Password
1	AP800_1A2B3C	192.168.254.253	Draytek-gps	Autoch13	002 1x(WPA/WPA2)	10/64	1.1.0	Password
2	AP800-SF	192.168.254.230	Draytek-hw	ch13	WPA2-AES	—	1.1.0	Password
3	AP800-1F2A	192.168.254.112	Draytek-1234567	ch6	None	2/64	1.1.0	Password

Note : Green : Online Red : Offline Gray : Hidden SSID

Vigor Router



VigorAP 810